

TQJ-0409XTI

Indoor Omni Antenna

Technical Sheet



Note: the picture is for reference only, please kindly consult with the real product.

Specifications

Model	TQJ-0409XTI	
Freq.Range-MHz	380~400	806~870
Gain-dBi	2±1	5±1
Beamwidth-°	80±10/40±10	
VSWR	≤2.0	
Impedance-Ω	50	
Polarization	Vertical	
Max.Power-W	50	
Connector	N Female or customized	
Dimension-mm	(293×240×100) ±2	
Weight-g	700	
Operation temperature-°C	-40~+60	
Humidity-%	5~95	
Mounting way	Fixed with Nut	


Applications

- 380~870MHz Band
- Indoor coverage system

Features

- 380~870MHz band
- Low VSWR
- Lightweight LOSH、Antiflaming ABS Radome
- Ceiling mount,easy to install

Installation Sketch

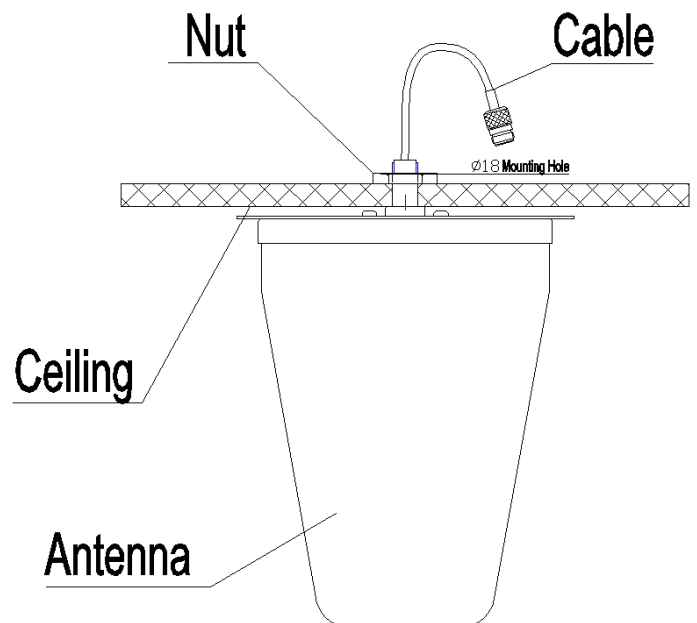

KENBOTONG TECHNOLOGY CO., LTD.

Addr: NO.2 Chanxiu Road, Foshan City, Guangdong, China
 Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072
 Email: kbt@kenbotong.com web: <http://www.kenbotong.com>