




<b>Multi-band Panel</b>	<b>870~960</b>	<b>1710~1880</b>
<b>Dual Polarization</b>	<b>X</b>	<b>X</b>
<b>Half-power Beam Width</b>	<b>65°</b>	<b>65°</b>
<b>Fixed Electrical Downtilt</b>	<b>0°</b>	<b>0°</b>

XXPol 870~960/1710~1880MHz 65° 14/16dBi 0° /0° Tilt


Electrical specifications	KBT65DP1416-0918AT0	
Frequency range (MHz)	870~960	1710~1880
Polarization	±45°	
Gain (dBi)	2×14	2×16
Electrical Downtilt (°)	0	0
Half-power beam width (°)	Horizontal:65 Vertical:15	Horizontal:65 Vertical:7.5
Sidelobe suppression for first sidelobe above main beam (dB)	≥15	≥15
Front-to-back ratio (dB)	≥25	≥25
Cross-polar discrimination (dB)	≥15(±60°≥10)	≥15(±60°≥10)
Isolation (dB)	≥30	≥28
Impedance (Ω)	50	
VSWR	≤1.4	≤1.4
Intermodulation IM3 (2×43dBm carrier)	≤-150dBc	
Maximum power (W)	400	200
Lighting protection	DC Ground	



Mechanical specifications	
Connector	4×7/16DIN Female
Connector position	Bottom
Height/width/depth (mm)	1270×270×137
Packing size (mm)	1600×330×220
Weight (kg)	15
Radome material	UPVC
Radome color	Gray
Mechanical tilt (°)	0~15
Operating temperature (°C)	-40~60
Rated wind velocity (m/s)	60
Suitable pole diameter (mm)	50~115
Mounting kit	JM-900BZ

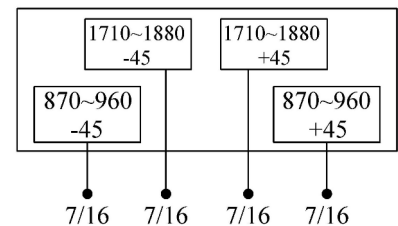

**870~960MHz: ±45° Pol.**



**1710~1880MHz: ±45° Pol.**

