

TDJ-5158PP8


Offset Parabolic Antenna

Technical Sheet



Features


- 5.15~5.85GHz Tri-band
- High gain up to 30 dBi
- Vertical or Horizontal Operation
- Offset Feed
- UV Stable light Gray Powder Coat Finish
- Easy to Assemble

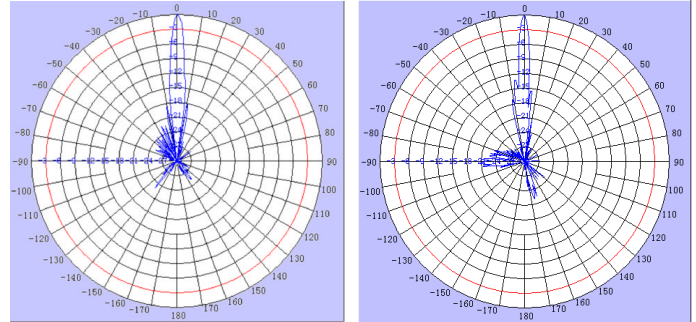

Specifications

| | |
|------------------|------------------------|
| Model | TDJ-5158PP8 |
| Freq. Range-MHz | 5150-5850 |
| Bandwidth-MHz | 700 |
| Gain-dBi | 30 |
| Beamwidth-° | E:5 H:4 |
| F/B-dB | ≥25 |
| VSWR | ≤1.8 |
| Impedance-Ω | 50 |
| Polarization | Vertical or Horizontal |
| Max. Power-W | 100 |
| Connector | N Female |
| Dimension-m | 0.76x0.83 |
| Weight-Kg | 5.6 |
| Pole Diameter-mm | φ 50-75 |

Installation Sketch

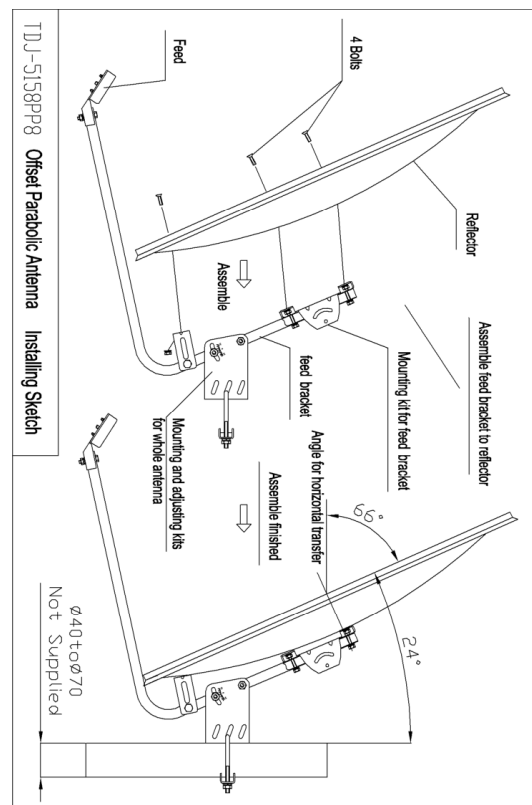

Kenbotong Communication LTD.

Addr: Kenbotong Technology Park, No.2 Chanxiu Road, Foshan, Guangdong, China, 528061

Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072

Email: kbt@kenbotong.com web: <http://www.kenbotong.com>