

TQJ-2527A12

Fiberglass Omni Antenna

Technical Sheet




Applications

- 2.5-2.7GHz Band
- WiFi system
- Base Station Antenna

Features

- High Gain, Low VSWR
- High quality fiberglass radome
- Supplied with steel mounting kits
- Mast mounting
- Integral N-Female Connector

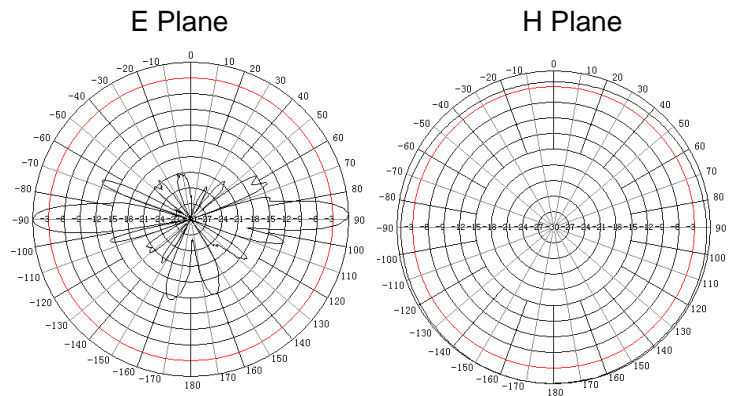

Specifications

Model	TQJ-2527A12
Freq.Range-MHz	2500 to 2700
Bandwidth-MHz	200
Gain-dBi	12
Ver.Beamwidth-°	7
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical
Max.Power-W	100
Connector	N Female
Length-mm	1020
Mounting way	Mast
Mast Diameter-mm	φ 35 to φ 50
Weight-Kg	0.9
Rated wind velocity-m/s	60

Installation Sketch

