

TQJ-3500A

3.5GHz Fiberglass Omni Antenna Technical Sheet




Applications

- WiMAX System
- Signal Coverage

Features


- Low VSWR, High Gain
- Strong Antisepsis Capability
- All Weather Operation
- Integral N Female Connector
- Supplied with Pole Mounting Kit

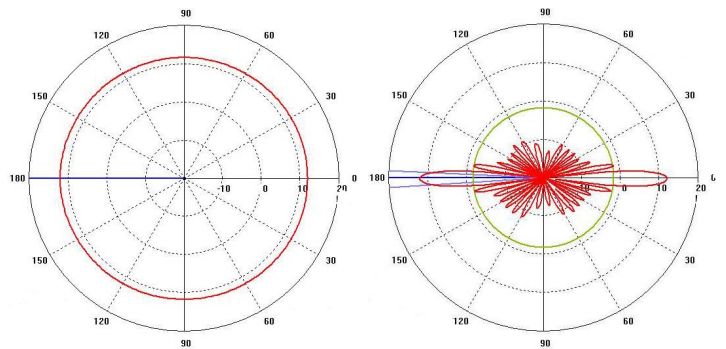

Specifications

Model	TQJ-3500A
Freq.Range-MHz	3400-3600
Bandwidth-MHz	150
Gain-dBi	11
Ver.Beamwidth-°	9.5
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical
Max.Power-W	100
Connector	N Female
Dimensions-mm	φ20×790
Weight-g	550
Pole Diameter-mm	φ40-50

Installation Sketch

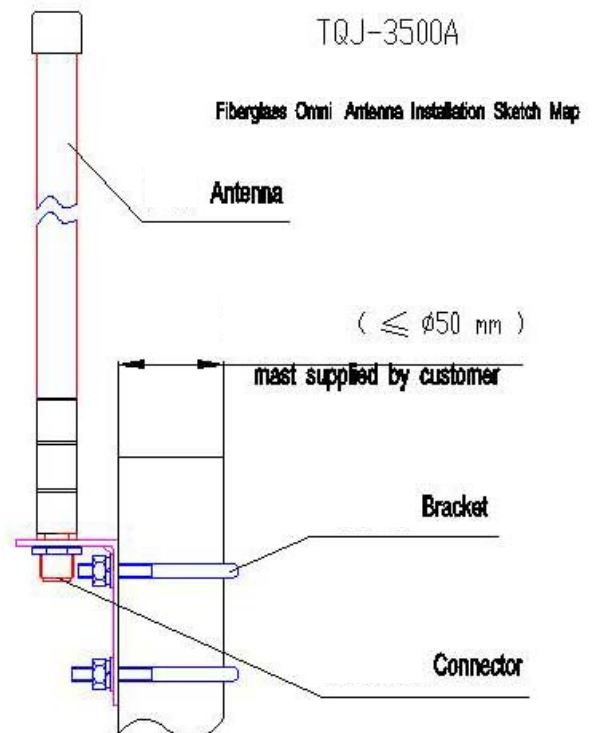

Kenbotong Communication LTD.

Addr: Kenbotong Technology Park, No.2 Chanxiu Road, Foshan, Guangdong, China 528061

Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072

Email: kbt@kenbotong.com web: <http://www.kenbotong.com>