

TQJ-400A

Aluminum Alloy Omni Antenna

Technical Sheet



Applications

- 400 to 480MHz band
- Point to multipoint
- Wireless video system
- Wireless trunking system



Features

- Aluminum alloy or stainless steel material
- Strong adaptability of bad weather
- Supplied with steel mounting kit

Specifications

Model	TQJ-400A
Freq.Range-MHz	400 to 480
Bandwidth-MHz	16
Gain-dBi	6.5
Ver.Beamwidth-°	25
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical
Max.Power-W	100
Connector	UHF female or N female
Length-m	1 (vary with freq.)
Weight-Kg	1 (vary with freq.)
Mast Diameter-mm	φ 40 to 50

Installation Sketch

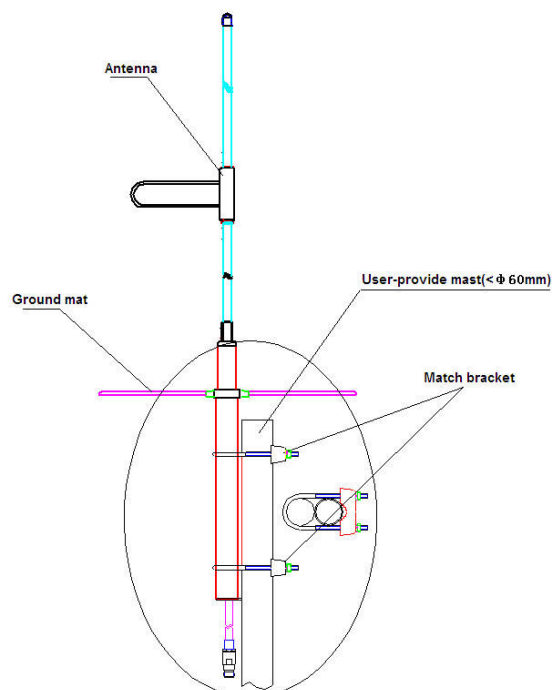

Kenbotong Communication LTD.

Addr: Kenbotong Technology Park, No2. Chanxiu Road, Foshan, Guangdong, China 528061

Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072

Email: kbt@kenbotong.com web: <http://www.kenbotong.com>