TQJ-600D

Fiberglass Omni Antenna


Technical Sheet

Applications

- Point to multipoint
- Wireless video system
- Wireless trunking system

Features

- Superior performance
- Sealed with fiberglass
- Strong adaptability of environment
- Heavy-duty steel mounting kit
- Divided into two segments to pack and transport

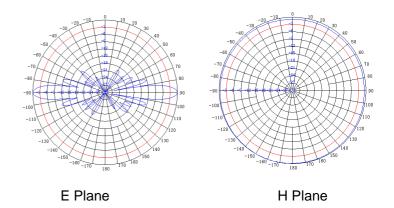

Specifications

Model	TQJ-600D
Freq.Range-MHz	580-690
Bandwidth-MHz	30
Gain-dBi	10.2
Ver.Beamwidth-°	10
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical
Maximum Power-W	100
Connector	N female or customized
Length-m	3.85
Weight-Kg	3.5(bracket excluded)
Mast Diameter-mm	φ 40 to 50

Installation Sketch

