

# TDJ-3500BKF

## Wall Mount Antenna

### Technical Sheet



#### Applications

- 3.5GHz Fixed Wireless Access
- 3.5GHz WiMax
- Point to Point / Point to Multi-point Application
- Client Antenna


#### Features

- Broadband, High gain
- Small Size, Low Profile
- ABS Radome
- Indoor Used
- Connector with Pigtail

#### Specifications

Model	TDJ-3500BKF
Freq. Range-MHz	3400~3600
Bandwidth-MHz	200
Gain-dBi	12
VSWR	≤1.5
Beamwidth-°	E: 30 H: 80
Impedance-Ω	50
Polarization	Vertical
Max. Power-W	50
Connector Type	N Female or Customization
Dimension-mm	145×97×38
Weight-g	210
Fixing Way	Hang on the wall

#### Install Sketch

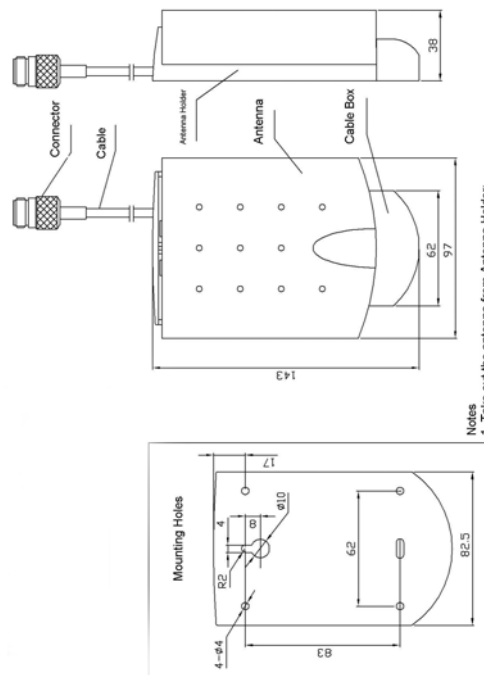

Notes

1. Take out the antenna from Antenna Holder.
2. Mounting the antenna to the cable.
3. Mounting the Antenna Holder to the wall.
4. Put the antenna to the Antenna Holder.

