

# TDJ-5158BKF90


## Wall Mount Antenna

### Technical Sheet




#### Features

- Superior Performance
- Small Size, Low Profile
- Lightweight ABS Radome
- Indoor Used

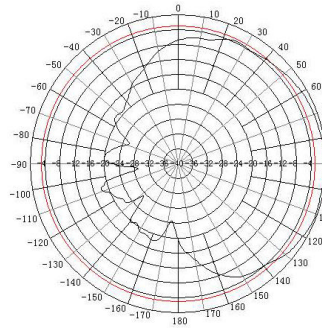

H-Plane

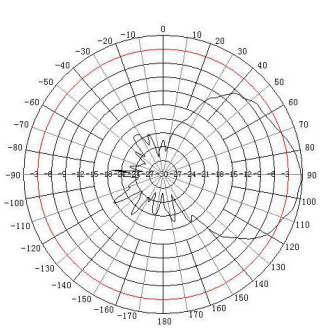


E-Plane

#### Specifications

Model	TDJ-5158BKF90
Freq. Range-MHz	5150~5850
Bandwidth-MHz	700
Gain-dBi	7.3
Beamwidth-°	E: 31 H: 90
VSWR	≤1.8
F/B Ratio-dB	≥18
Impedance-Ω	50
Polarization	Vertical
Max. Power-W	50
Connector Type	SMA Male or Customization
Dimension-mm	125×97×30
Weight-g	200
Fixing Way	Hung on the wall

#### Install Sketch

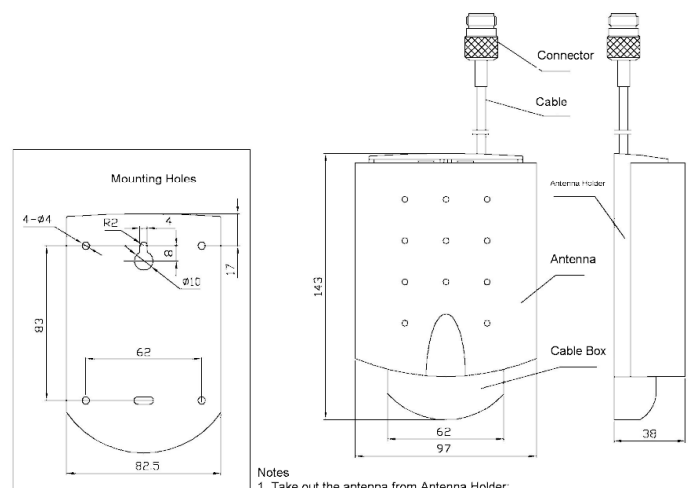

#### Notes

1. Take out the antenna from Antenna Holder.
2. Drill holes at the wall according to the maps.
3. Mounting the Antenna Holder to the wall.
4. Put the antenna to the Antenna Holder.



Kenbotong Communication LTD.

Addr : Kenbotong Technology Park, No.2 Chanxiu Road, Foshan, Guangdong, China 528061

Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072

Email: kbt@kenbotong.com web: <http://www.kenbotong.com>