


TDJ-2458BKT-A

Dual Band Panel Antenna

Technical Sheet

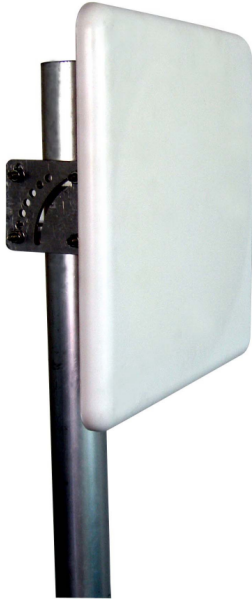

Applications

- 2.4/5.1/5.5/5.8GHz WLAN System
- 5.8GHz UNII/5.8GHz ISM System
- WiFi System
- Point to point or multipoint applications
- Wireless bridge


Features

- Dual band broadband operation
- High Gain, Low VSWR
- Light weight , Small size, Low profile
- Strong corrosion resistance
- Supplied with mast mounting kits

Specifications

Model	TDJ-2458BKT-A	
Freq.Range-MHz	2400~2483	5725~5850
Bandwidth-MHz	83	125
Gain-dBi	14	17
Ver.Beamwidth-°	20	11
Hor.Beamwidth-°	40	20
VSWR	≤1.5	
Impedance-Ω	50	
Polarization	Vertical	
Max.Power-W	50	
Connector	N Female	
Dimension-mm	306×306×25	
Weight-Kg	1.4(with bracket)	
Mounting	Mast	
Mast Diameter-mm	φ 40~ φ 50	

Installation Sketch

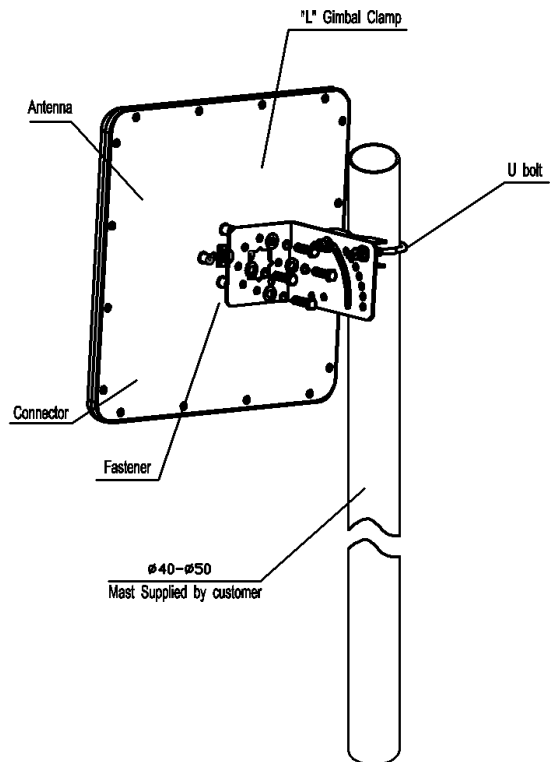

Kenbotong Communication LTD.

Addr : Kenbotong Technology Park, No.2 Chanxiu Road, Foshan, Guangdong, China 528061

Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072

Email: kbt@kenbotong.com web: <http://www.kenbotong.com>