

# TDJ-0825XDA

## High Gain Ceiling Antenna Technical Sheet



Note: The extended cable is white or black.

### Applications

- 800~2500MHz Band
- Wireless communication system
- Wireless data transmission


### Features

- 800~2500MHz band
- Low VSWR
- Support current main popular communication system
- ABS Radome
- Ceiling mount,easy to install
- Extend a Low Loss Cable

### Specifications

Model	TDJ-0825XDA	
Freq.Range-MHz	806~960	1710~2500
Gain-dBi	5	7
Hor.Beamwidth-°	95±15/75±15	
Ver.Beamwidth-°	100/70	
F/B Ratio-dB	6/8	
VSWR	≤1.5	
Impedance-Ω	50	
Polarization	Vertical	
Max.Power-W	100	
Connector	N Female or customized	
Dimension-mm	φ 170×72	
Weight-Kg	0.4	
Operation temperature-°C	-40~+60	
Humidity-%	5~95	
Mounting way	Fixed with Nut	

### Installation Sketch

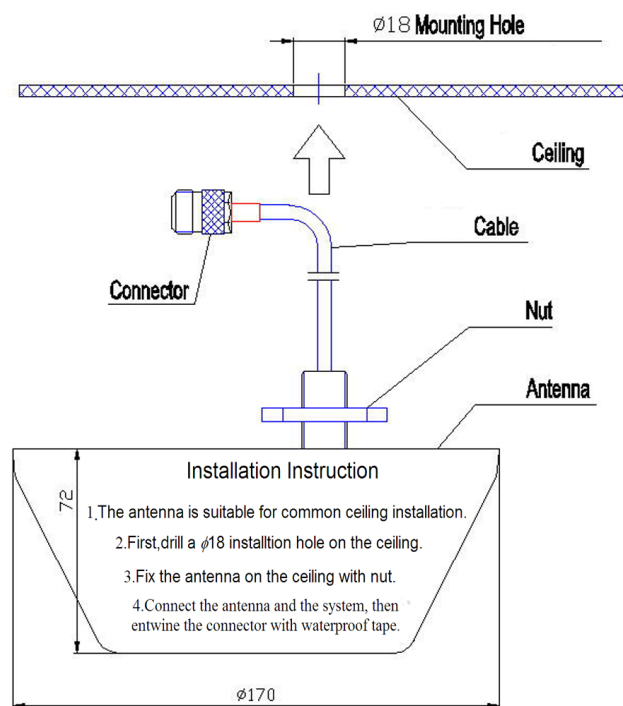

Kenbotong Communication LTD.

Addr: NO.2 Chanxiu Road, Foshan City, Guangdong China Code: 528061  
Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072  
Email: kbt@kenbotong.com web: <http://www.kenbotong.com>